


Ductile Iron Socketed Reducers for uPVC

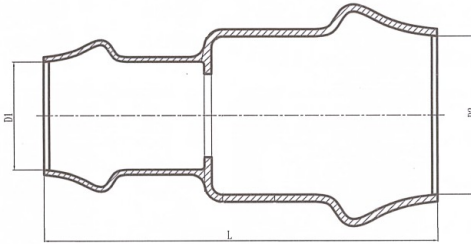


Ductile iron bitumen coated. These fittings can be ordered with a fusion bonded epoxy coating

Dimensions (mm)

Item	D1	D2	L	Weight (Kg)
63/50	50	63	190	1,65
75/63	63	75	200	2,56
90/63	63	90	215	
90/75	75	90	215	3,10
110/63	63	110	235	3,90
110/75	75	110	235	4,00
110/90	90	110	240	4,35
160/63	63	160	310	7,47
160/75	75	160	310	7,25
160/90	90	160	250	5,85
160/110	110	160	285	8,15
200/110	110	200	330	12,35
200/160	160	200	340	12,50
250/110	110	250	360	20,05
250/160	160	250	380	17,25
250/200	200	250	380	20,55
315/110	110	315	410	24,85
315/200	200	315	430	25,10
315/250	250	315	435	25,90

Ductile Iron Repair Coupling for uPVC

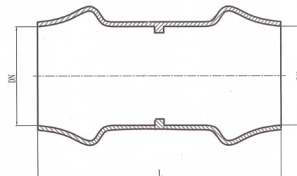

Ductile iron bitumen coated. These fittings can be ordered with a fusion bonded epoxy coating

Dimensions (mm)

Item	DN	L	Weight (Kg)
63	63	180	1,8
75	75	200	2,35
90	90	240	3,5
110	110	270	4,95
160	160	300	8,4
200	200	310	12,5
250	250	330	18,25
315	315	420	28,95